
UNIBOX PAINTED ENCLOSURE TYPE UNI B21 IN PAINTED ALUMINIUM ALLOY 315X410X150 IP66/IP67

SERIES UNIBOX ENCLOSURE

CODE 520021



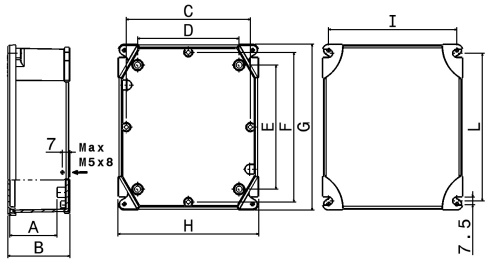

Codice	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
520020	105.5	122	236	198	238	286	314	264	236	275	10
520021	132.5	150	286	248	333	381	410	315	283	367	10

Datasheet

Electrical characteristics

Insulation Class	I
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	95W

Mechanical characteristics

Manufacturing material	Aluminum alloy
Treatment type	Fluorozirconic passivation
Surface finishing	Painted grey RAL 7042
Color	Grey RAL 7042
Execution	Wall mounting
Height Box	143.5 mm
Cover height	12 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	-
Window type	-
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	Equivalent to C4(M)/C3(H) (ISO 12944)
Working Environment Temp.	Min: -40°C ;Max: +90°C
Warehousing Temperature	Min: -50°C ;Max: +90°C
Dimensions	315X410X150 mm
Internal dimensions	291X386X126 mm
Net Weight	4.22 KG

Reference Standards and Directives

Certification and approval marks	IMQ, UKCA, NYCE COLOMBIA, CE, CB IMQ
Directives	2014/35/EU (LVD)
Reference Standards	EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670 -1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011

The images are purely indicative. Palazzoli reserves the right to make changes without notice.